

# SPACE TIME INTERFERENCE ALIGNMENT SCHEME FOR THE MIMO BC AND IC WITH DELAYED CSIT AND FINITE COHERENCE TIME

Yohan Lejosne<sup>\*†</sup>, Dirk Slock<sup>†</sup>, Yi Yuan-Wu<sup>\*</sup>

<sup>\*</sup>Orange Labs, RESA/WASA

38-40 Rue du General Leclerc, 92794 Issy Moulineaux Cedex 9, FRANCE

Email: {yohan.lejosne, yi.yuan}@orange.com

<sup>†</sup>EURECOM, Mobile Communications Dept.

Campus SophiaTech, 450 route des Chappes, 06410 Biot Sophia Antipolis, FRANCE

Email: dirk.slock@eurecom.fr

## ABSTRACT

Most techniques designed for the multi-input multiple-output (MIMO) Broadcast Channel (BC) and MIMO Interference Channel (IC) require accurate current and instantaneous channel state information at the transmitter (CSIT) which is not a realistic assumption because of feedback delay. A novel approach by Lee and Heath, space-time interference alignment, proves that in the underdetermined (overloaded) multi-input single-output (MISO) BC with  $N_t$  transmit antennas and  $K = N_t + 1$  users  $N_t$  (sum) Degrees of Freedom (DoF) are achievable if the feedback delay is not too big, thus disproving the conjecture that any delay in the feedback necessarily causes a DoF loss. However the feedback delay need to remain less or equal to  $\frac{T_c}{N_t+1}$ . We consider the MIMO BC and show that the use of multi-antenna receivers allow to achieve full (sum) DoF with even bigger feedback delay, up to  $\frac{T_c}{N_r+1}$ . We also extend this result to the MIMO IC.

**Index Terms**— Broadcast channel, interference channel, delayed CSIT, interference alignment

## 1. INTRODUCTION

Interference is a major limitation in wireless networks and the search for efficient ways of transmitting in this context has been productive and diversified [1–3]. Numerous techniques allow the increase of the multiplexing gain. However, most techniques, even promising linear solutions [4, 5] rely on perfect current CSIT which is not realistic. CSIT is by nature delayed and imperfect. Though interesting results have

been found concerning imperfect CSIT [6], feedback delay can also be an issue. However, a recent study [7] caused a paradigm shift by proposing a scheme (MAT) yielding more than one degree of freedom (DoF) in the MISO BC while relying solely on perfect but completely outdated CSIT.

Since the assumption of totally independent channel variation is overly pessimistic for numerous practical scenarios another scheme was proposed in [8] for the time correlated MISO broadcast channel with 2 users. This scheme optimally combines delayed CSIT and current CSIT (both imperfect) but has not been generalized for a larger number of users. Another scheme that simply performs ZF and superposes MAT only during the dead times of ZF has been proposed in [9]. It recovers the results of optimality of [8] for  $K = 2$  but is valid for any number of users. It is based on a block fading model but it has been shown that stationary fading can be modeled exactly as a special block fading model in [9].

The importance of optimizing training and feedback strategies in the MIMO BC was shown in [10, 11]. The range of coherence time in which the sole use of MAT yields an increased multiplexing gain accounting for feedback overhead is determined in [12] and accounting for training costs is determined in [13]. In general, weighted net DoF could be considered as in [14] since forward and reverse link rates could have different weights. In [9, 15] unweighted net DoF, accounting for training and feedback, are studied. The need for the optimization of the number of active antennas (and users) to limit the overheads is emphasized in [15].

It was generally believed that any delay in the feedback necessarily causes a DoF loss. However, Lee and Heath in [16] proposed a scheme, hereafter referred to as space-time interference alignment (STIA), that achieves  $N_t$  (sum) DoF in the block fading underdetermined MISO BC with  $N_t$  transmit antennas and  $K = N_t + 1$  users if the feedback delay is small enough ( $\leq \frac{T_c}{K}$ ). We will show that in the case of multi-antenna receivers the full sum DoF can be preserved up to feedback delays of  $\frac{T_c}{N_r+1}$ . We will also extend this result to

<sup>†</sup> EURECOM's research is partially supported by its industrial members: Orange, BMW Group, Swisscom, Cisco, SFR, ST Ericsson, Symantec, SAP, Monaco Telecom.

<sup>\*</sup>Part of this work has been performed in the framework of the FP7 project ICT-317669 METIS, which is partly funded by the European Union. The authors would like to acknowledge the contributions of their colleagues in METIS, although the views expressed are those of the authors and do not necessarily represent the project.

the MIMO Interference Channel (IC).

## 2. MIMO BC SYSTEM MODEL

We consider a MIMO BC with  $K$  users equipped with  $N_r$  antennas and a transmitter equipped with  $N_t$  antennas. The input-output relationship of the channel at time  $n$  for user  $k$  is given by

$$\mathbf{y}^{(k)}[n] = \mathbf{H}^{(k)}[n]\mathbf{x}[n] + \mathbf{v}^{(k)}[n] \quad (1)$$

where  $\mathbf{y}^{(k)}[n] = [y_1^{(k)}[n], \dots, y_{N_r}^{(k)}[n]]^T \in \mathbb{C}^{N_r \times 1}$  is the signal received by user  $k$  and more specifically for  $i \in [1, N_r]$ ,  $y_i^{(k)}[n]$  is the signal received by the  $i$ th antenna of user  $k$ .  $\mathbf{x}[n] \in \mathbb{C}^{N_t \times 1}$  is the signal sent by the transmitter,  $\mathbf{H}^{(k)}[n] = [h_{i,j}^{(k)}[n]] \in \mathbb{C}^{N_r \times N_t}$  and  $\mathbf{v}^{(k)}[n]$  respectively denote the channel matrix and the independent and identically distributed (i.i.d.) Gaussian noise for user  $k$ . We consider a block fading model: the channel coefficients are constant for the channel coherence time  $T_c$  and change independently between blocks. However the equivalence of this model with the more realistic stationary fading was proven in [9].  $T_{fb}$  is the feedback delay.

The performance metric is (sum) DoF (also called multiplexing gain), it is the prelog of the sum rate. Let  $R(P)$  be the ergodic (sum) throughput of a MIMO BC with  $K$  receivers and transmit power  $P$  then

$$\text{DoF} = \lim_{P \rightarrow \infty} \frac{R(P)}{\log_2(P)}.$$

## 3. SPACE-TIME INTERFERENCE ALIGNMENT FOR THE MIMO BC WITH DELAYED ONLY CSIT

Lee and Heath [16] proposed a scheme (STIA) to achieve  $N_t$  DoF in the MISO BC with  $K = N_t + 1$  users when  $\gamma = \frac{T_{fb}}{T_c} \leq \frac{1}{K}$ . This result was unexpected as it was previously conjectured that any delay in the feedback caused a DoF loss, however the condition on  $\gamma$  can become problematic with a large number of transmit antennas (or users). We will see how having receivers with multiple antennas allow to preserve the full sum DoF for a wider range of feedback delays.

We consider the MIMO-BC with  $N_t$  transmit antennas,  $N_r$  receive antennas and  $K$  users such that  $K = \frac{N_t}{N_r} + 1$ , therefore we assume  $\frac{N_t}{N_r}$  to be an integer. Concerning the feedback delay, we are looking for the maximum feedback delay for which we still reach full sum DoF. The borderline case for our scheme is  $\gamma = \frac{1}{K} = \frac{N_r}{N_t + N_r}$ . In this case the current CSI is known at the transmitter only after the first  $T_{fb} = \frac{T_c}{K}$  symbol periods.

### 3.1. STIA-MIMO Scheme for the MIMO BC

The STIA-MIMO scheme we propose allows the transmission of  $N_t$  messages to each of the  $K$  users in  $K$  symbol periods

scattered over  $K$  coherence blocks. More precisely, we use symbol periods  $\{n_1, n_2, \dots, n_K\}$  respectively in blocks  $\{n+1, n+2, \dots, n+K\}$ . This results in a transient regime for the first  $K$  blocks after which we have  $KT_{fb}$  instances of the scheme in each block assuring the  $N_t$  DoF announced in the stationary state. We now focus on one instance of the STIA-MIMO scheme scattered over blocks  $n+1$  to  $n+K$  for a  $n \geq K$  so that we are in steady state. Only the symbol period  $n_1$  in the first block corresponds to the transmitter not having the current CSI.

Messages  $\mathbf{s}^{(k)} = [s_1^{(k)}, \dots, s_{N_t}^{(k)}]^T \in \mathbb{C}^{N_t \times 1}$  are intended for user  $k, k \in [1, K]$ .  $\mathbf{H}[n] = [\mathbf{H}^{(1)T}[n], \dots, \mathbf{H}^{(K)T}[n]]^T \in \mathbb{C}^{KN_r \times N_t}$  represents the channel matrix during block  $n$  and  $\mathbf{y}[n_j] = [\mathbf{y}^{(1)T}[n_j], \dots, \mathbf{y}^{(K)T}[n_j]]^T \in \mathbb{C}^{KN_r \times 1}$  the concatenation of the received signals at the receivers during symbol period  $n_j$ . Since we are interested in the DoF provided by the scheme, we hereafter omit the noise variables to be concise. The transmitter always sends a combination of all symbols at each symbol period, always the same symbols for an instance of the scheme but with time-varying beamforming matrices  $\mathbf{V}^{(k)}[n_j] \in \mathbb{C}^{N_t \times N_t}$

$$\mathbf{x}[n_j] = \sum_{k=1}^K \mathbf{V}^{(k)}[n_j] \mathbf{s}^{(k)}.$$


During the first symbol period  $n_1$ , the transmitter does not have any information on the current channel state, so for  $k \in [1, K]$ ,  $\mathbf{V}^{(k)}[n_1] = \mathbf{I}_{N_t}$ , the  $N_t$  by  $N_t$  identity matrix, is as good as any other matrix of full rank. The transmission scheme is summarized as follows

$$\begin{bmatrix} \mathbf{y}[n_1] \\ \mathbf{y}[n_2] \\ \vdots \\ \mathbf{y}[n_K] \end{bmatrix} = \text{diag}(\mathbf{H}[n+1], \mathbf{H}[n+2], \dots, \mathbf{H}[n+K]) * \begin{bmatrix} \mathbf{I}_{N_t} & \dots & \mathbf{I}_{N_t} \\ \mathbf{V}^{(1)}[n_2] & \dots & \mathbf{V}^{(K)}[n_2] \\ \vdots & & \vdots \\ \mathbf{V}^{(1)}[n_K] & \dots & \mathbf{V}^{(K)}[n_K] \end{bmatrix} \begin{bmatrix} \mathbf{s}^{(1)} \\ \mathbf{s}^{(2)} \\ \vdots \\ \mathbf{s}^{(K)} \end{bmatrix} = \begin{bmatrix} \mathbf{H}[n+1] & \dots & \mathbf{H}[n+1] \\ \mathbf{H}[n+2]\mathbf{V}^{(1)}[n_2] & \dots & \mathbf{H}[n+2]\mathbf{V}^{(K)}[n_2] \\ \vdots & & \vdots \\ \mathbf{H}[n+K]\mathbf{V}^{(1)}[n_K] & \dots & \mathbf{H}[n+K]\mathbf{V}^{(K)}[n_K] \end{bmatrix} \begin{bmatrix} \mathbf{s}^{(1)} \\ \mathbf{s}^{(2)} \\ \vdots \\ \mathbf{s}^{(K)} \end{bmatrix}$$

The received signal at user  $i$  and time  $n_1$  is

$$\mathbf{y}^{(i)}[n_1] = \sum_{k=1}^K \mathbf{H}^{(i)}[n+1] \mathbf{s}^{(k)} = \mathbf{H}^{(i)}[n+1] \sum_{k=1}^K \mathbf{s}^{(k)}. \quad (2)$$

The beamforming matrices are constructed so that the interference alignment is simply done at each receiver by a subtraction of two received signal vectors:  $\mathbf{y}^{(i)}[n_j] - \mathbf{y}^{(i)}[n_1]$ ,  $j \in$

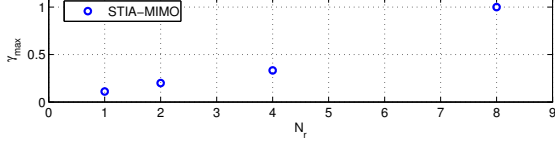

**Fig. 1.** Maximum value of  $\gamma$  to assure a full sum DoF of  $N_t = 8$  as a function of  $N_r$ .

$[2, K]$ . For user  $i$ , at time  $n_j, j \in [2, K]$ , we have

$$\mathbf{y}^{(i)}[n_j] - \mathbf{y}^{(i)}[n_1] = \sum_{k=1}^K \left( \mathbf{H}^{(i)}[n+j] \mathbf{V}^{(k)}[n_j] - \mathbf{H}^{(i)}[n+1] \right) \mathbf{s}^{(k)}$$

so the interferences are aligned if

$$\mathbf{H}^{(i)}[n+j] \mathbf{V}^{(k)}[n_j] - \mathbf{H}^{(i)}[n+1] = \mathbf{0}_{N_t}, \forall i \neq k$$

where  $\mathbf{0}_{N_t}$  is the  $N_t$  by  $N_t$  null matrix. In other words the beamforming matrices  $\mathbf{V}^{(k)}[n_j]$  should transform the channel matrix  $\mathbf{H}^{(i)}[n+j]$  in  $\mathbf{H}^{(i)}[n+1]$  for  $i \neq k$  so that the same interferences are received at any time  $n_j, j \in [1, K]$ . This is done by defining the beamforming matrix for user  $k$  and time  $n_j$  as follows

$$\mathbf{V}^{(k)}[n_j] = \begin{bmatrix} \mathbf{H}^{(1)}[n+j] \\ \vdots \\ \mathbf{H}^{(k-1)}[n+j] \\ \mathbf{H}^{(k+1)}[n+j] \\ \vdots \\ \mathbf{H}^{(K)}[n+j] \end{bmatrix}^{-1} \begin{bmatrix} \mathbf{H}^{(1)}[n+1] \\ \vdots \\ \mathbf{H}^{(k-1)}[n+1] \\ \mathbf{H}^{(k+1)}[n+1] \\ \vdots \\ \mathbf{H}^{(K)}[n+1] \end{bmatrix} \quad (3)$$

for  $j \in [2, K]$  which assures

$$\begin{bmatrix} \mathbf{y}^{(i)}[n_2] - \mathbf{y}^{(i)}[n_1] \\ \mathbf{y}^{(i)}[n_3] - \mathbf{y}^{(i)}[n_1] \\ \vdots \\ \mathbf{y}^{(i)}[n_K] - \mathbf{y}^{(i)}[n_1] \end{bmatrix} = \underbrace{\begin{bmatrix} \mathbf{H}^{(i)}[n+2] \mathbf{V}^{(i)}[n_2] - \mathbf{H}^{(i)}[n+1] \\ \mathbf{H}^{(i)}[n+3] \mathbf{V}^{(i)}[n_3] - \mathbf{H}^{(i)}[n+1] \\ \vdots \\ \mathbf{H}^{(i)}[n+K] \mathbf{V}^{(i)}[n_K] - \mathbf{H}^{(i)}[n+1] \end{bmatrix}}_{\mathbf{H}_{eff}^{(i)}} \mathbf{s}^{(i)}$$

and user  $i$  can decode  $\mathbf{s}^{(i)}$  since the rank of the  $N_t \times N_t$  matrix  $\mathbf{H}_{eff}^{(i)}$  is almost surely  $N_t$  because all channel vectors are independent with a continuous distribution. This scheme allows to transmit a total of  $N_t K$  independent data symbols in  $K$  channels uses thus yielding  $N_t$  sum DoF.

### 3.2. Performances

For  $N_r > 1$  we make use of the multiple receive antennas to widen the range of feedback delays for which we can preserve the full sum DoF. It achieves the full sum DoF  $N_t$  with a feedback delay of

$$\gamma_{max} = \frac{1}{\frac{N_t}{N_r} + 1} = \frac{N_r}{N_t + N_r} \quad (4)$$

of the coherence time  $T_c$ , which grows with the number of receive antennas  $N_r$ . Smaller value of  $T_{fb}$  can be dealt with by doing time sharing between the proposed scheme and simple zero-forcing (ZF) since ZF yields full sum DoF with CSIT.

In Fig. 1 we plot the maximum value of the ratio  $\frac{T_{fb}}{T_c}$  for which the full sum DoF is preserved with our scheme as a function of  $N_r$  for  $N_t = 8$  using (4) except for  $N_r = N_t$  because in this case full sum DoF is reached with no CSIT at all by doing the ZF on the receiver side. For example for a coherence time of  $T_c = 100$  symbol periods with single antenna receivers the full sum DoF can be achieved with delay up to 11 symbol periods whereas receivers with 2 antennas can deal with feedback delay up to 20 symbol periods. From (4) we see that for a large  $N_t$  and small values of  $N_r$ ,  $\gamma$  grows linearly with  $N_r$  as a first order approximation.

The theoretical interest of this solution was already stressed in [16], the authors showed that the STIA scheme (for the MISO BC) outperforms the MAT-ZF association in terms of DoF. It is worth mentioning that this is also generally true in terms of net DoF, accounting for feedback and overhead, as it has been shown in [17].

## 4. MIMO IC

### 4.1. System Model

We consider a MIMO IC with  $K$  transmitter receiver pairs, with  $N_t$  transmit antennas per base station and  $N_r$  receive antennas per user subject to the constraint  $\frac{N_t}{N_r} \in \mathbb{N}$  as we assume  $K = \frac{N_t}{N_r} + 1$ . The channel matrix between transmitter  $i$  and receiver  $j$  at time  $n$  is  $\mathbf{H}^{(i,j)}[n]$ . Since in the MIMO BC we always sent a combination of all symbols it can easily be extended to the MIMO IC, the only difference is that at one receiver the signals intended for different receivers are multiplied by different channel matrices whereas in the BC there are all multiplied by the same channel matrix.

### 4.2. Scheme

As in the BC we want to construct the beamforming matrices so that the interference alignment is done at each receiver by a subtraction of two received signal vectors:  $\mathbf{y}^{(i)}[n_j] - \mathbf{y}^{(i)}[n_1], j \in [2, K]$ .

This is done by defining the beamforming matrix for user  $k$  and time  $n_j$  as follows

$$\mathbf{V}^{(k)}[n_j] = \begin{bmatrix} \mathbf{H}^{(k,1)}[n+j] \\ \vdots \\ \mathbf{H}^{(k,k-1)}[n+j] \\ \mathbf{H}^{(k,k+1)}[n+j] \\ \vdots \\ \mathbf{H}^{(k,K)}[n+j] \end{bmatrix}^{-1} \begin{bmatrix} \mathbf{H}^{(k,1)}[n+1] \\ \vdots \\ \mathbf{H}^{(k,k-1)}[n+1] \\ \mathbf{H}^{(k,k+1)}[n+1] \\ \vdots \\ \mathbf{H}^{(k,K)}[n+1] \end{bmatrix} \quad (5)$$

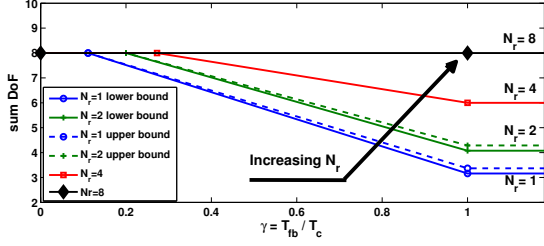


Fig. 2. Time sharing between STIA and MAT for  $N_t = 8$ .

for  $j \in [2, K]$  which assures

$$\begin{bmatrix} \mathbf{y}^{(i)}[n_2] - \mathbf{y}^{(i)}[n_1] \\ \mathbf{y}^{(i)}[n_3] - \mathbf{y}^{(i)}[n_1] \\ \vdots \\ \mathbf{y}^{(i)}[n_K] - \mathbf{y}^{(i)}[n_1] \end{bmatrix} = \underbrace{\begin{bmatrix} \mathbf{H}^{(i,i)}[n+2]\mathbf{V}^{(i)}[n_2] - \mathbf{H}^{(i,i)}[n+1] \\ \mathbf{H}^{(i,i)}[n+3]\mathbf{V}^{(i)}[n_3] - \mathbf{H}^{(i,i)}[n+1] \\ \vdots \\ \mathbf{H}^{(i,i)}[n+K]\mathbf{V}^{(i)}[n_K] - \mathbf{H}^{(i,i)}[n+1] \end{bmatrix}}_{\mathbf{H}_{eff}^{(i)}} \mathbf{s}^{(i)}$$

and user  $i$  can decode  $\mathbf{s}^{(i)}$  since the rank of the  $N_t \times N_t$  matrix  $\mathbf{H}_{eff}^{(i)}$  is almost surely  $N_t$  because all channel vectors are independent with a continuous distribution. This scheme allows to transmit a total of  $N_t K$  independent data symbols in  $K$  channels uses thus yielding  $N_t$  DoF.

### 4.3. Performances

As in the BC, in the IC we are able to make use of the multiple receive antennas to widen the range of feedback delay for which we can preserve the  $N_t$  sum DoF. It achieves the sum DoF of  $N_t$  with feedback delays up to

$$\gamma_{max} = \frac{1}{\frac{N_t}{N_r} + 1} = \frac{N_r}{N_t + N_r} \quad (6)$$

of the coherence time  $T_c$  which grows with the number of receive antennas  $N_r$ . From (6) we see that for a large  $N_t$  and small values of  $N_r$ ,  $\gamma$  grow almost linearly with  $N_r$ .

## 5. LONGER FEEDBACK DELAYS

In the schemes previously presented the multiple receive antennas allow to extend the range of feedback delay for which the full sum DoF can be preserved. Feedback delays longer than the threshold  $\frac{N_r}{N_t + N_r}$  can simply be dealt with by doing time sharing between STIA and a scheme designed for completely outdated CSIT (MAT schemes from [7]) as suggested in [16] for the MISO BC case. If [7] is focused on the MISO BC, most of the schemes presented can be extended to the case of receivers with multiple antennas. Theorem 2 and 4 in [7] give a lower and an upper bound for the sum DoF. Here  $\text{DoF}(\cdot, \cdot, \cdot)$  refers to MIMO BC whereas  $\text{DoF}_1(\cdot, \cdot)$  refers to MISO BC. For multiple antenna receivers the lower bound

becomes  $\text{DoF}^L(N_t, K, N_r) = N_r \text{DoF}_1^L(\frac{N_t}{N_r}, K)$  where

$$\text{DoF}_1^L(M, K) = \frac{M}{\sum_{i=1}^{K-M} \frac{1}{i} \left(\frac{M-1}{M}\right)^{i-j} + \left(\frac{M-1}{M}\right)^{K-M} \left(\sum_{i=K-M+1}^K \frac{1}{i}\right)}$$

in the MIMO BC with  $N_t$  transmit antennas and  $K$  receivers equipped with  $N_r$  antennas. The upper bound becomes  $\text{DoF}^U(N_t, K, N_r) = N_r \text{DoF}_1^U(\frac{N_t}{N_r}, K)$  where

$$\text{DoF}_1^U(M, K) = \frac{K}{\frac{1}{\min\{1, M\}} + \frac{1}{\min\{2, M\}} + \dots + \frac{1}{\min\{K, M\}}}$$

In Fig. 2 lower and upper bounds on the DoF region for  $N_t = 8$  and different  $N_r$  as a function of  $\gamma$  are given. We observe that increasing the number of receive antennas allows to win on both sides, preserving the full sum DoF on a wider range of  $\gamma$  and also increasing the DoF reached by MAT. For  $N_r = 4$  there is only one curve because the upper bound is  $\text{DoF}^U(8, 3, 4) = 4 \text{DoF}_1^U(2, 3)$  and  $\text{DoF}_1^U(2, 3)$  is achievable according to Theorem 5 in [7]. For  $N_r = 8$  there is only one curve because  $\text{DoF} = \min\{N_t = 8, N_r = 8\} = 8$  is achievable without any CSIT.

A similar strategy can be used in the MIMO IC with similar results by using the IC MAT like schemes in [18, 19] but will not be described here to be more concise.

## 6. CONCLUSION

The STIA scheme by Lee and Heath is very interesting as it proved that up to a certain delay in the feedback the full DoF of the MISO BC is still attainable. By extending this result to multiple antenna receivers (MIMO BC), we managed to widen the range of feedback delays for which the full sum DoF can be preserved obtaining a more widely applicable scheme that also seems interesting when feedback and training are to be taken into account. We also described an extension to a combination with MAT to cover all possible feedback delays. Finally we provided a minor variation of the scheme to adapt it to the IC, allowing to maintain  $N_t$  DoF for the same range of feedback delays as in the BC.

## 7. REFERENCES

- [1] G. Caire and S. Shamai, "On the achievable throughput of a multiantenna gaussian broadcast channel," *Information Theory, IEEE Transactions on*, vol. 49, no. 7, pp. 1691–1706, July 2003.
- [2] D. Gesbert, S. Hanly, H. Huang, S. Shamai Shitz, O. Simeone, and W. Yu, "Multi-cell mimo cooperative networks: A new look at interference," *Selected Areas in Communications, IEEE Journal on*, vol. 28, no. 9, pp. 1380–1408, december 2010.
- [3] V. Cadambe and S. Jafar, "Interference alignment and degrees of freedom of the  $n$ -user interference channel," *Information Theory, IEEE Transactions on*, vol. 54, no. 8, pp. 3425–3441, aug. 2008.
- [4] C. Guthy, W. Utschick, and G. Dietl, "Low-Complexity Linear Zero-Forcing for the MIMO Broadcast Channel," *IEEE Trans. Sel. Topics Sig. Proc.*, Dec. 2009.
- [5] C. Guthy, W. Utschick, R. Hunger, and M. Joham, "Efficient Weighted Sum Rate Maximization with Linear Precoding," *IEEE Trans. Sig. Proc.*, Apr. 2010.
- [6] A. Lapidath, S. Shamai, and M. A. Wigger, "On the capacity of fading mimo broadcast channels with imperfect transmitter side-information," *Arxiv preprint arxiv:0605079*, 2006.
- [7] M. Maddah-Ali and D. Tse, "Completely stale transmitter channel state information is still very useful," in *Proc. Allerton*, Monticello, IL, USA, Oct. 2010.
- [8] X. Yi, D. Gesbert, S. Yang, and M. Kobayashi, "The DoF Region of the Multiple-Antenna Time Correlated Interference Channel with Delayed CSIT," *Subm. to IEEE Trans. on Information Theory*, Apr. 2012, <http://arxiv.org/pdf/1204.3046.pdf>.
- [9] Y. Lejosne, D. Slock, and Y. Yuan-Wu, "Degrees of Freedom in the MISO BC with Delayed-CSIT and Finite Coherence Time: a Simple Optimal Scheme," in *Proc. ICSPCC*, Hong Kong, China, Aug. 2012.
- [10] M. Kobayashi, G. Caire, and N. Jindal, "How much training and feedback are needed in mimo broadcast channels?" in *Proc. ISIT*, Toronto, Canada, July 2008.
- [11] U. Salim and D. T. M. Slock, "How much feedback is required for TDD multi-antenna broadcast channels with user selection?" *EURASIP Journal on Advances in Signal Processing Vol. 2010 (2010), Article ID 278952*, 05 2010.
- [12] J. Xu, J. Andrews, and S. Jafar, "Miso broadcast channels with delayed finite-rate feedback: Predict or observe?" *Wireless Communications, IEEE Transactions*, vol. 11, no. 4, pp. 1456–1467, 2012.
- [13] M. Kobayashi and G. Caire, "On the net DoF comparison between ZF and MAT over time-varying MISO broadcast channels," in *Proc. ISIT*, Boston, MA, USA, Jun. 2012.
- [14] C. Suh, I.-H. Wang, and D. Tse, "Two-way Interference Channels," in *Proc. ISIT*, Boston, MA, USA, Jun. 2012.
- [15] Y. Lejosne, D. Slock, and Y. Yuan-Wu, "Degrees of Freedom in the MISO BC with delayed-CSIT and Finite Coherence Time: Optimization of the number of users," in *Proc. NetGCooP*, Avignon, France, Nov. 2012.
- [16] N. Lee and R. W. Heath Jr., "Not too delayed csit achieves the optimal degrees of freedom," in *Proc. Allerton*, Monticello, IL, USA, Oct. 2012.
- [17] Y. Lejosne, D. Slock, and Y. Yuan-Wu, "Net Degrees of Freedom of Recent Schemes for the MISO BC with Delayed CSIT and Finite Coherence Time," in *Proc. WCNC*, Shanghai, China, Apr. 2013.
- [18] H. Maleki, S. Jafar, and S. Shamai, "Retrospective interference alignment," in *Proc. ISIT*, St Petersburg, Russia, Aug. 2011.
- [19] C. Vaze and M. Varanasi, "The degrees of freedom region and interference alignment for the MIMO interference channel with delayed CSIT," *Information Theory, IEEE Transactions on*, vol. 58, no. 7, pp. 4396–4417, July 2012.